


Aries



Sections

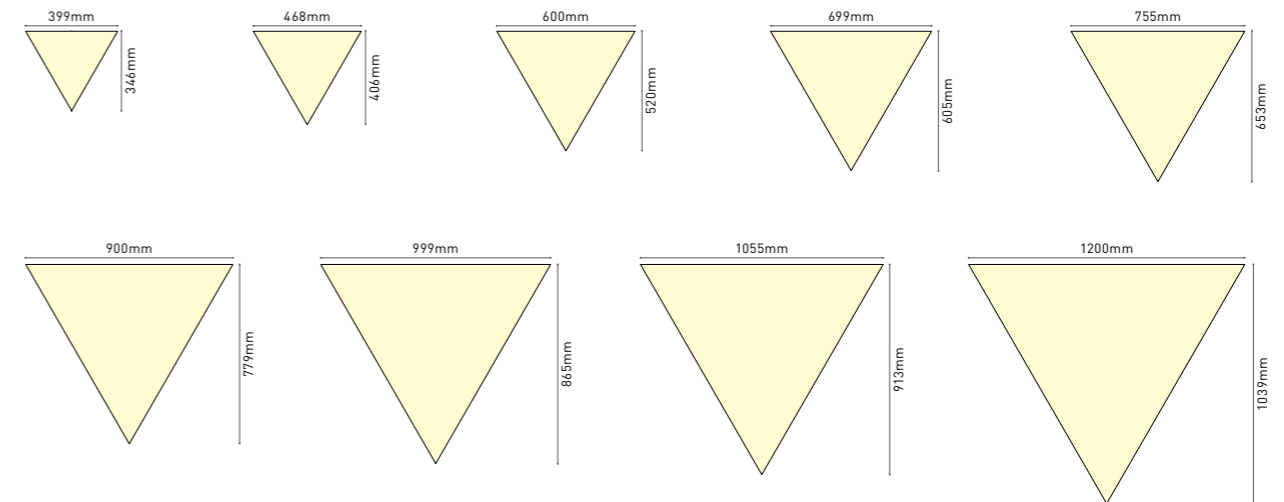

Ordering code for Aries series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-AR-399	H80xW346xL399	12	1200	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-AR-468	H80xW406xL468	16	1600						
	LCXX80-AR-600	H80xW520xL600	30	3000						
	LCXX80-AR-699	H80xW605xL699	40	4000						
	LCXX80-AR-755	H80xW653xL755	45	4500						
	LCXX80-AR-900	H80xW779xL900	60	6000						
	LCXX80-AR-999	H80xW865xL999	70	7000						
	LCXX80-AR-1055	H80xW913xL1055	80	8000						
LCXX100	LCXX100-AR-399	H100xW346xL399	12	1200	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-AR-468	H100xW406xL468	16	1600						
	LCXX100-AR-600	H100xW520xL600	30	3000						
	LCXX100-AR-699	H100xW605xL699	40	4000						
	LCXX100-AR-755	H100xW653xL755	45	4500						
	LCXX100-AR-900	H100xW779xL900	60	6000						
	LCXX100-AR-999	H100xW865xL999	70	7000						
	LCXX100-AR-1055	H100xW913xL1055	80	8000						
LCXX100-AR-1200	H100xW1039xL1200	100	10000							

Accessories




Taurus



UGR

Normal

Sections

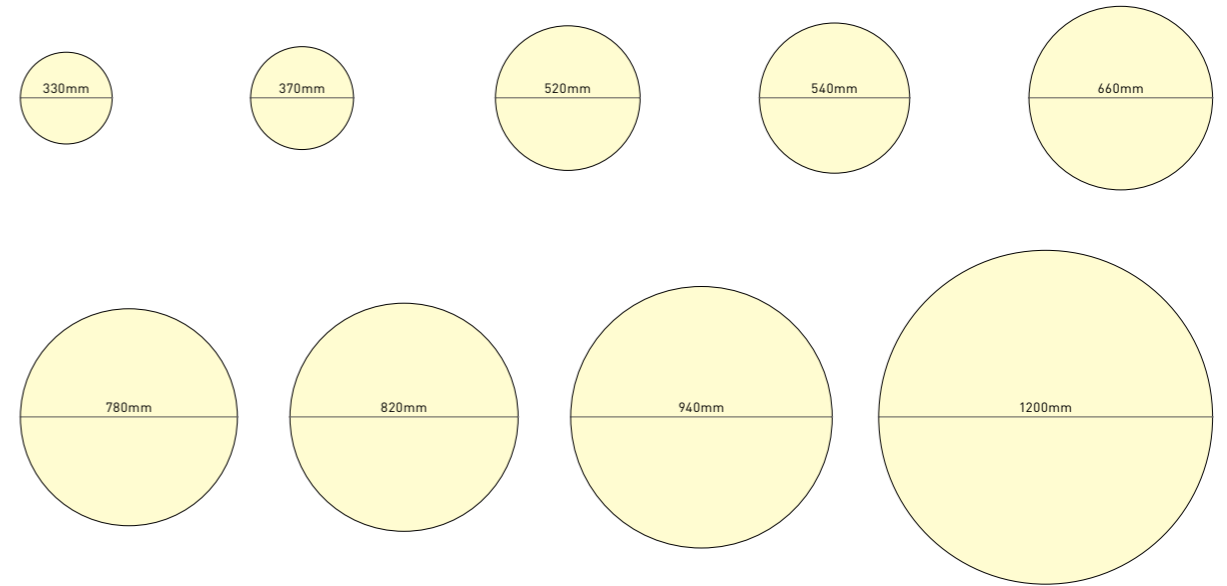

Ordering code for Taurus series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-TA-330	H80xW330xL330	15	1500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-TA-370	H80xW370xL370	20	2000						
	LCXX80-TA-520	H80xW520xL520	35	3500						
	LCXX80-TA-540	H80xW540xL540	40	4000						
	LCXX80-TA-660	H80xW660xL660	60	6000						
	LCXX80-TA-780	H80xW780xL780	80	8000						
	LCXX80-TA-820	H80xW820xL820	90	9000						
	LCXX80-TA-940	H80xW940xL940	120	12000						
LCXX100	LCXX100-TA-330	H100xW330xL330	15	1500						
	LCXX100-TA-370	H100xW370xL370	20	2000						
	LCXX100-TA-520	H100xW520xL520	35	3500						
	LCXX100-TA-540	H100xW540xL540	40	4000						
	LCXX100-TA-660	H100xW660xL660	60	6000						
	LCXX100-TA-780	H100xW780xL780	80	8000						
	LCXX100-TA-820	H100xW820xL820	90	9000						
	LCXX100-TA-940	H100xW940xL940	120	12000						
LCXX100-TA-1200	H100xW1200xL1200	200	20000							

Accessories



CB CE RoHS FLICKER FREE 5 YEARS WARRANTY

Gemini





CB CE RoHS FLICKER FREE 5 YEARS WARRANTY

Cancer



GOLDEN RATIO DESIGN

CB CE RoHS FLICKER FREE 5 YEARS WARRANTY

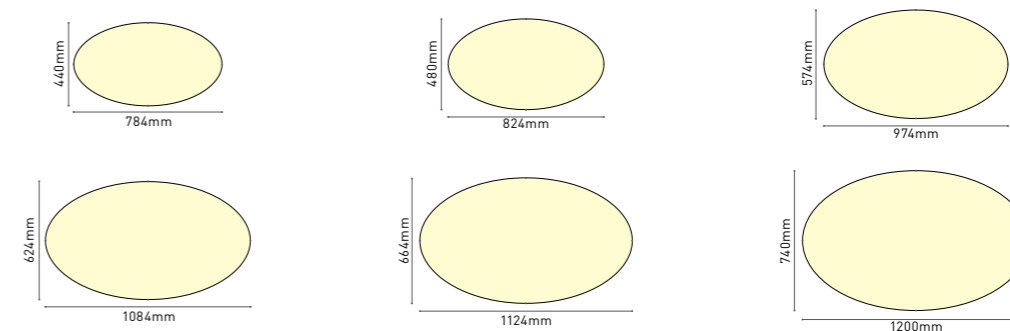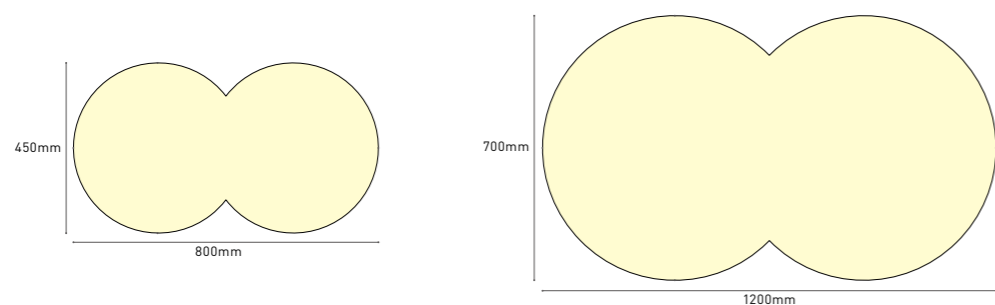

Ordering code for Gemini series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-GE-800	H80xW450xL800	50	5000	Dali Push Triac 0-10V Remote Tunable	3000K	>80	200-240	White	CE
	LCXX80-GE-1200	H80xW700xL1200	120	12000		4000K			Black	CB
LCXX100	LCXX100-GE-800	H100xW450xL800	50	5000	0-10V Remote Tunable	6000K	>90	100-277	Silver	SA
	LCXX100-GE-1200	H100xW700xL1200	120	12000		RGB			>95	Gold



Accessories



Ordering code for Cancer series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-CA-784	H80xW440xL784	45	4500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SA RCM RoHS
	LCXX80-CA-824	H80xW480xL824	55	5500						
	LCXX80-CA-974	H80xW574xL974	75	7500						
	LCXX80-CA-1084	H80xW624xL1084	90	9000						
	LCXX80-CA-1124	H80xW664xL1124	100	10000						
	LCXX80-CA-1200	H80xW740xL1200	120	12000						
LCXX100	LCXX100-CA-784	H100xW440xL784	45	4500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SA RCM RoHS
	LCXX100-CA-824	H100xW480xL824	55	5500						
	LCXX100-CA-974	H100xW574xL974	75	7500						
	LCXX100-CA-1084	H100xW624xL1084	90	9000						
	LCXX100-CA-1124	H100xW664xL1124	100	10000						
	LCXX100-CA-1200	H100xW740xL1200	120	12000						

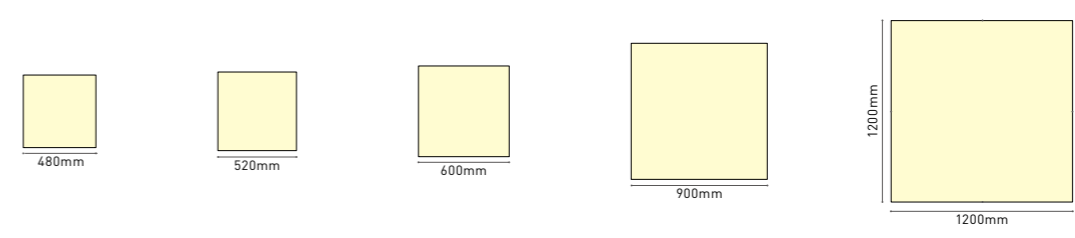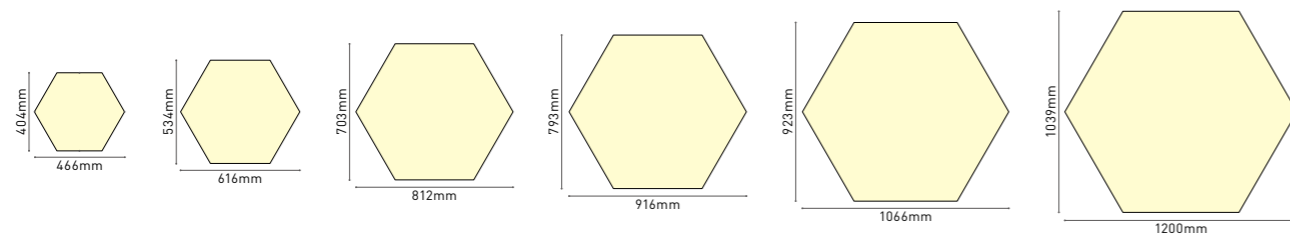

Ordering code for Leo series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-LE-466	H80xW404xL466	25	2500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-LE-616	H80xW534xL616	40	4000						
	LCXX80-LE-812	H80xW703xL812	75	7500						
	LCXX80-LE-916	H80xW793xL916	90	9000						
	LCXX80-LE-1066	H80xW923xL1066	120	12000						
	LCXX80-LE-1200	H80xW1039xL1200	160	16000						
LCXX100	LCXX100-LE-466	H100xW404xL466	25	2500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-LE-616	H100xW534xL616	40	4000						
	LCXX100-LE-812	H100xW703xL812	75	7500						
	LCXX100-LE-916	H100xW793xL916	90	9000						
	LCXX100-LE-1066	H100xW923xL1066	120	12000						
	LCXX100-LE-1200	H100xW1039xL1200	160	16000						

Ordering code for Virgo series


*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-VI-480	H80xW480xL480	40	4000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-VI-520	H80xW520xL520	50	5000						
	LCXX80-VI-600	H80xW600xL600	60	6000						
	LCXX80-VI-900	H80xW900xL900	140	14000						
	LCXX80-VI-1200	H80xW1200xL1200	250	25000						
	LCXX100	LCXX100-VI-480	H100xW480xL480	40						
LCXX100-VI-520		H100xW520xL520	50	5000						
LCXX100-VI-600		H100xW600xL600	60	6000						
LCXX100-VI-900		H100xW900xL900	140	14000						
LCXX100-VI-1200		H100xW1200xL1200	250	25000						

Libra



Sections

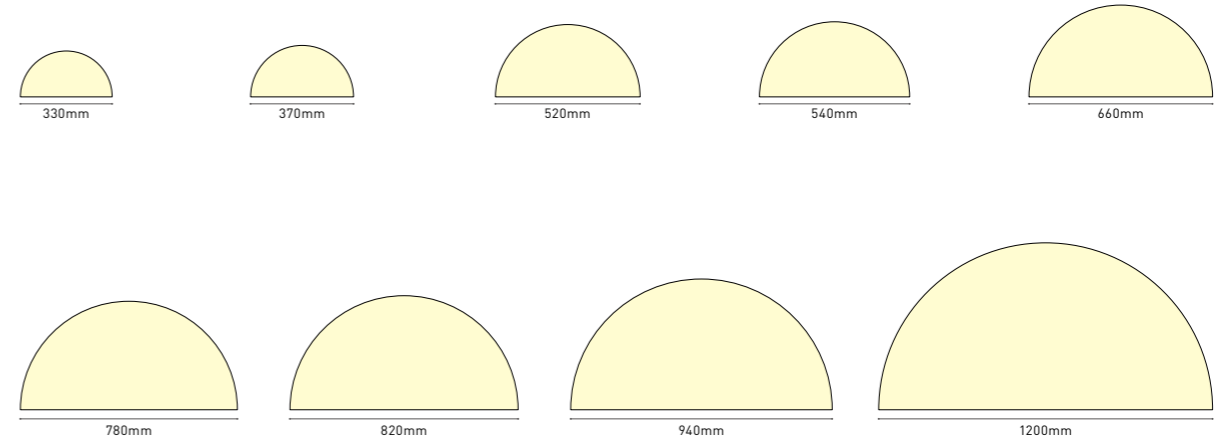

Ordering code for Libra series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-LI-330	H80xW165xL330	8	800	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-LI-370	H80xW185xL370	10	1000						
	LCXX80-LI-520	H80xW260xL520	18	1800						
	LCXX80-LI-540	H80xW270xL540	20	2000						
	LCXX80-LI-660	H80xW330xL660	30	3000						
	LCXX80-LI-780	H80xW390xL780	40	4000						
	LCXX80-LI-820	H80xW410xL820	45	4500						
LCXX100	LCXX100-LI-330	H100xW165xL330	8	800						
	LCXX100-LI-370	H100xW185xL370	10	1000						
	LCXX100-LI-520	H100xW260xL520	18	1800						
	LCXX100-LI-540	H100xW270xL540	20	2000						
	LCXX100-LI-660	H100xW330xL660	30	3000						
	LCXX100-LI-780	H100xW390xL780	40	4000						
	LCXX100-LI-820	H100xW410xL820	45	4500						
LCXX100-LI-940	H100xW470xL940	60	6000							
LCXX100-LI-1200	H100xW600xL1200	100	1000							

Accessories



Scorpio



Sections



Ordering code for Scorpio series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-SC-600	H80xW600xL600	60	6000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-SC-780	H80xW780xL780	100	10000						
	LCXX80-SC-820	H80xW820xL820	110	11000						
	LCXX80-SC-900	H80xW900xL900	130	13000						
	LCXX80-SC-952	H80xW952xL952	150	15000						
	LCXX80-SC-1036	H80xW1036xL1036	180	18000						
	LCXX80-SC-1080	H80xW1080xL1080	190	19000						
	LCXX80-SC-1120	H80xW1120xL1120	210	21000						
	LCXX80-SC-1200	H80xW1200xL1200	240	24000						
LCXX100	LCXX100-SC-600	H100xW600xL600	60	6000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-SC-780	H100xW780xL780	100	10000						
	LCXX100-SC-820	H100xW820xL820	110	11000						
	LCXX100-SC-900	H100xW900xL900	130	13000						
	LCXX100-SC-952	H100xW952xL952	150	15000						
	LCXX100-SC-1036	H100xW1036xL1036	180	18000						
	LCXX100-SC-1080	H100xW1080xL1080	190	19000						
	LCXX100-SC-1120	H100xW1120xL1120	210	21000						
	LCXX100-SC-1200	H100xW1200xL1200	240	24000						


Accessories



Sagittarius



CB CE RoHS FLICKER FREE 5 YEARS WARRANTY

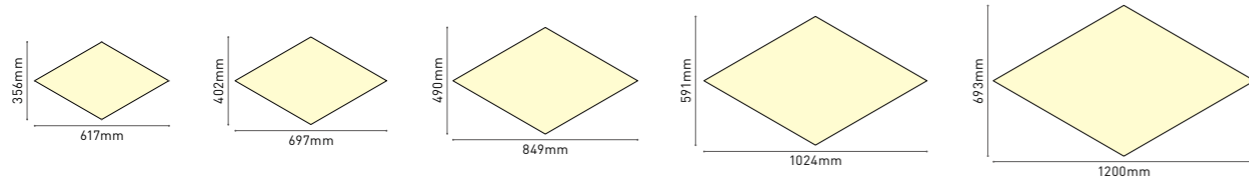

Ordering code for Sagittarius series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-SA-617	H80xW356xL617	20	2000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-SA-697	H80xW402xL697	25	2500						
	LCXX80-SA-849	H80xW490xL849	35	3500						
	LCXX80-SA-1024	H80xW591xL1024	50	5000						
	LCXX80-SA-1200	H80xW693xL1200	70	7000						
LCXX100	LCXX100-SA-617	H100xW356xL617	20	2000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-SA-697	H100xW402xL697	25	2500						
	LCXX100-SA-849	H100xW490xL849	35	3500						
	LCXX100-SA-1024	H100xW591xL1024	50	5000						
	LCXX100-SA-1200	H100xW693xL1200	70	7000						


Accessories



Capricon



CB CE RoHS FLICKER FREE 5 YEARS WARRANTY

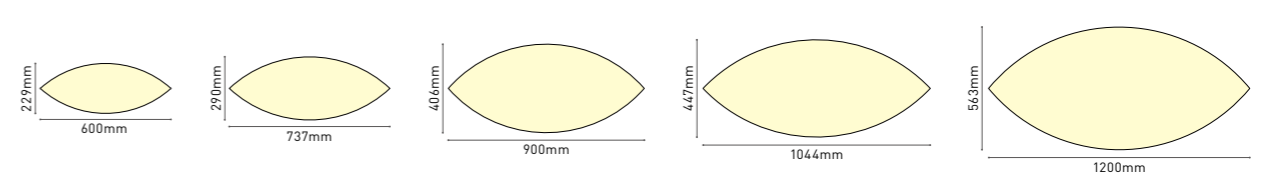

Ordering code for Capricon series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-CN-600	H80xW229xL600	16	1600	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-CN-737	H80xW290xL737	25	2500						
	LCXX80-CN-900	H80xW406xL900	45	4500						
	LCXX80-CN-1044	H80xW447xL1044	55	5500						
	LCXX80-CN-1200	H80xW563xL1200	80	8000						
LCXX100	LCXX100-CN-600	H100xW229xL600	16	1600	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-CN-737	H100xW290xL737	25	2500						
	LCXX100-CN-900	H100xW406xL900	45	4500						
	LCXX100-CN-1044	H100xW447xL1044	55	5500						
	LCXX100-CN-1200	H100xW563xL1200	80	8000						

Accessories




Aquarius




Sections


AT- Aquarius Triangle

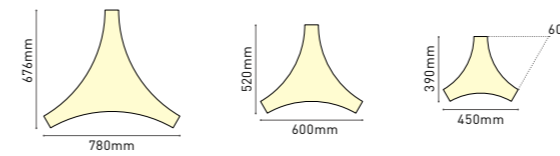

AQ- Aquarius Quadrangle

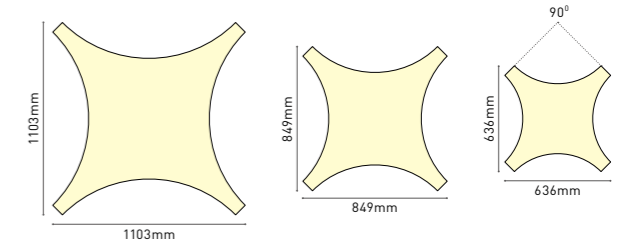

More shapes available

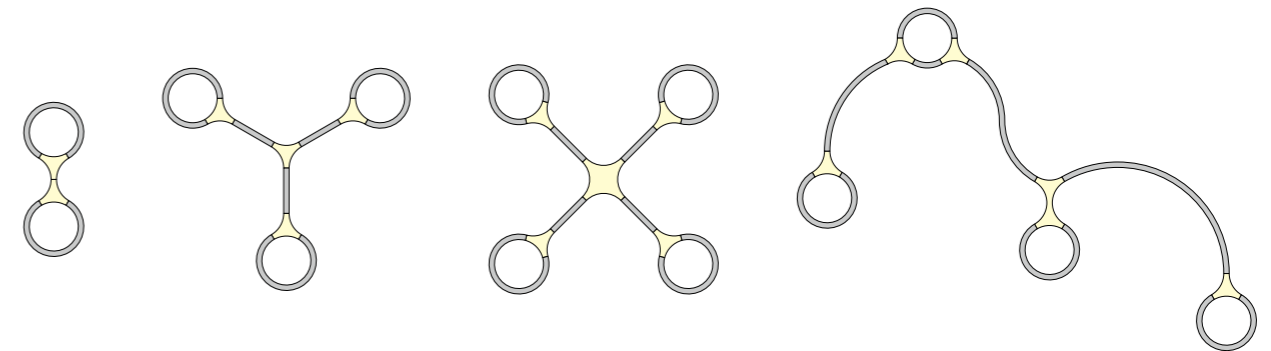

Ordering code for Aquarius series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W shape	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-AT-450	H80xW390xL450	10	1000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-AT-600	H80xW520xL600	18	1800						
	LCXX80-AT-780	H80xW676xL780	25	2500						
	LCXX80-AQ-636	H80xW636xL636	38	3800						
	LCXX80-AQ-849	H80xW849xL849	67	6700						
LCXX100	LCXX100-AQ-1103	H80xW1103xL1103	110	11000						
	LCXX100-AT-450	H100xW390xL450	10	1000						
	LCXX100-AT-600	H100xW520xL600	18	1800						
	LCXX100-AT-780	H100xW676xL780	25	2500						
	LCXX100-AQ-636	H100xW636xL636	38	3800						
	LCXX100-AQ-849	H100xW849xL849	67	6700						
	LCXX100-AQ-1103	H100xW1103xL1103	110	11000						


Accessories



Pisces



Sections

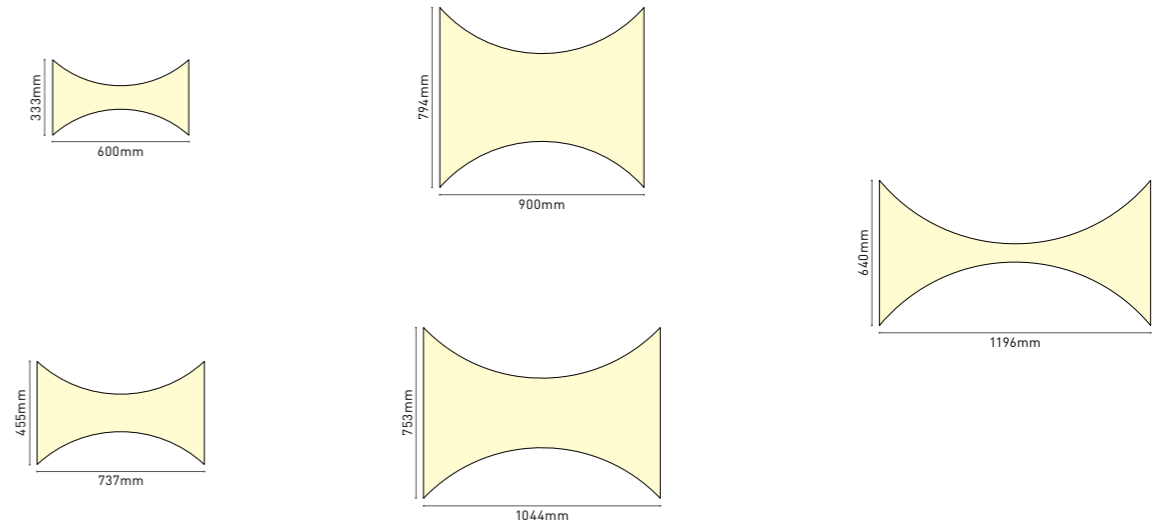

Ordering code for Pisces series


*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-PI-600	H80xW333xL600	18	1800	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-PI-737	H80xW455xL737	30	3000						
	LCXX80-PI-900	H80xW794xL900	80	8000						
	LCXX80-PI-1044	H80xW753xL1044	80	8000						
	LCXX80-PI-1196	H80xW640xL1196	50	5000						
LCXX100	LCXX100-PI-600	H100xW333xL600	18	1800	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-PI-737	H100xW455xL737	30	3000						
	LCXX100-PI-900	H100xW794xL900	80	8000						
	LCXX100-PI-1044	H100xW753xL1044	80	8000						
	LCXX100-PI-1196	H100xW640xL1196	50	5000						

Accessories



Up&down series

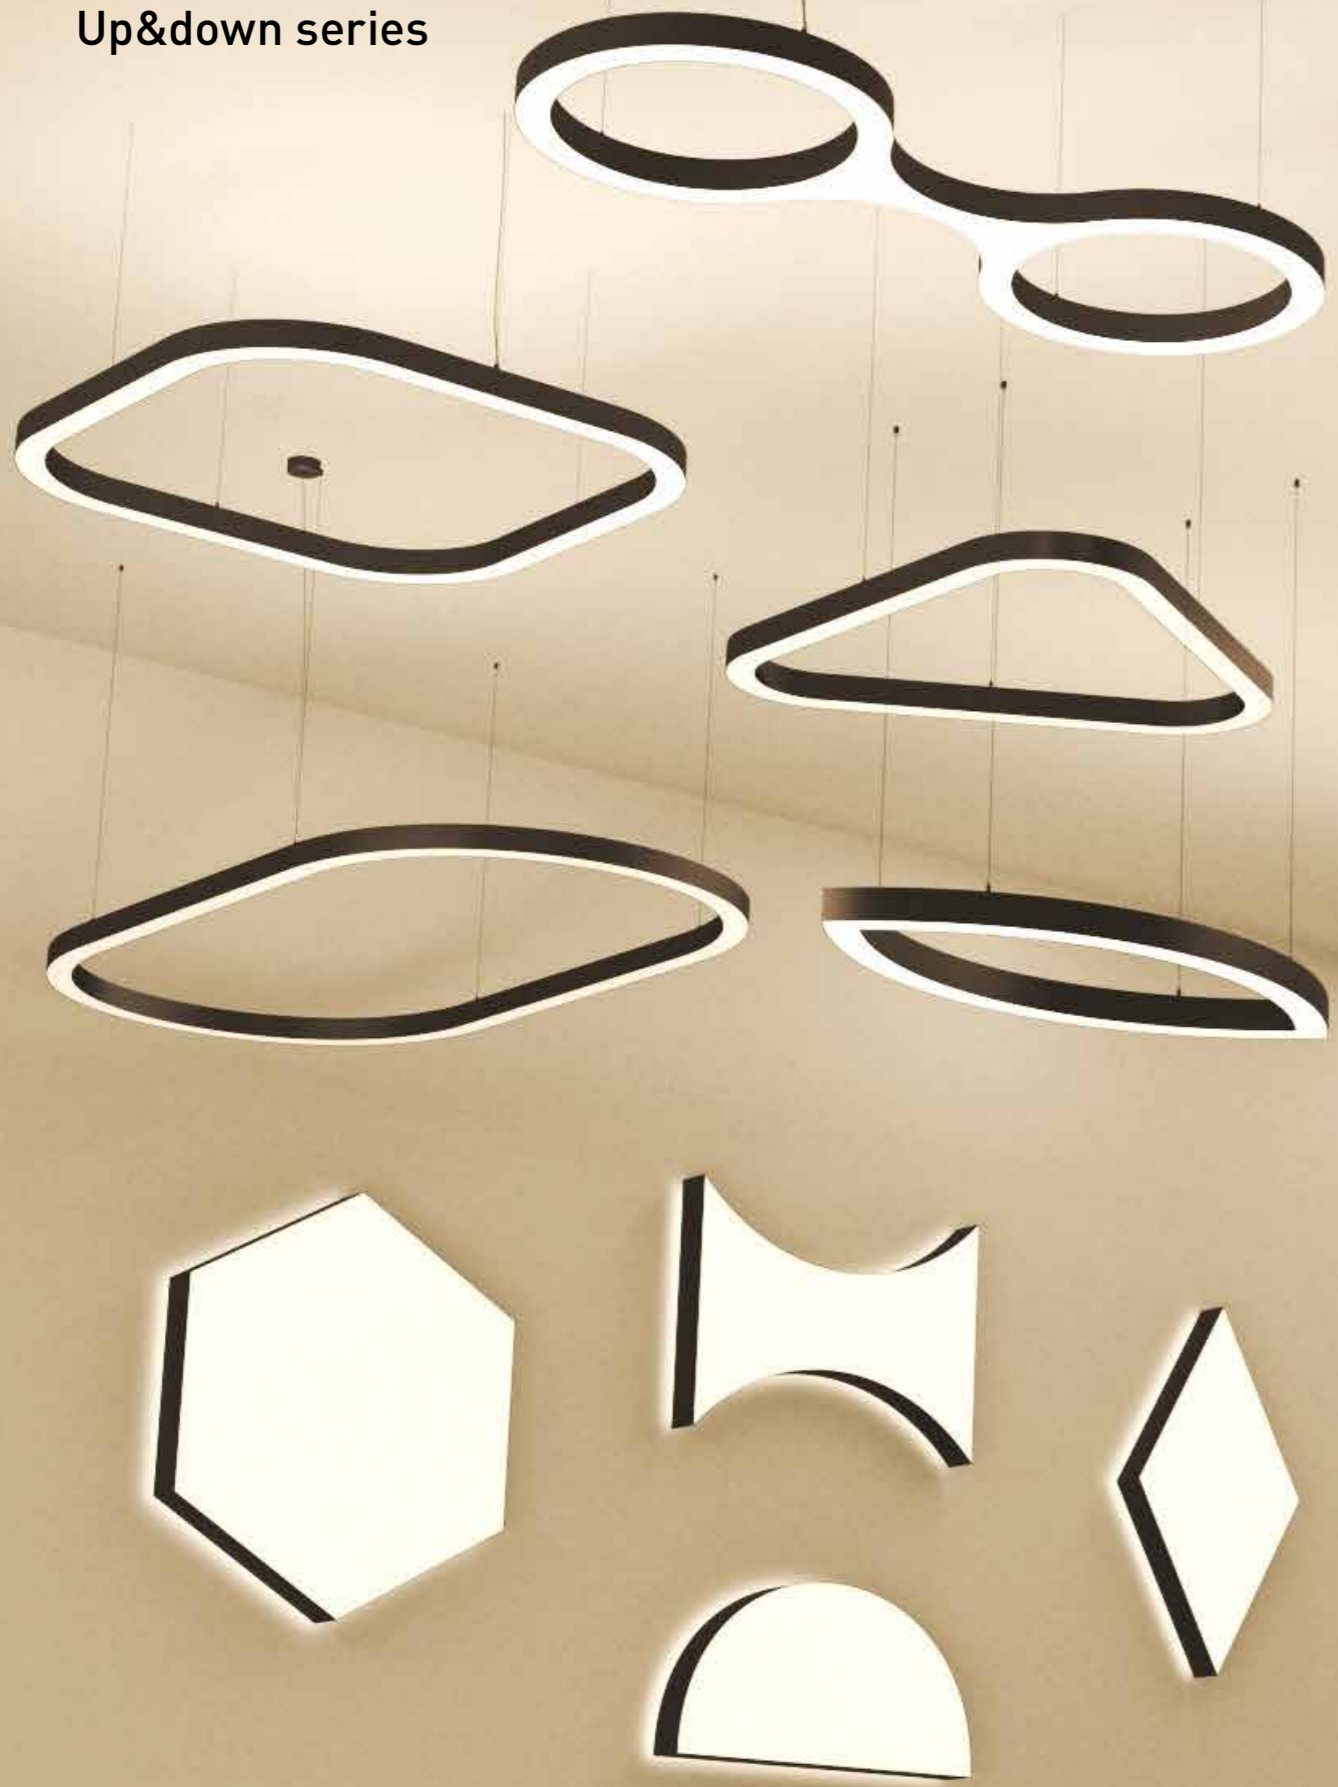

Ordering code for Up&down-Circle series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-C-450-U	H60xD450	10+10	2000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-C-600-U	H60xD600	15+15	3000						
	LC4060-C-740-U	H60xD740	20+20	4000						
	LC4060-C-900-U	H60xD900	25+25	5000						
	LC4060-C-1000-U	H60xD1000	30+30	6000						
	LC4060-C-1200-U	H60xD1200	35+35	7000						
	LC4060-C-1540-U	H60xD1540	40+40	8000						
	LC4060-C-1840-U	H60xD1840	55+55	11000						
	LC4060-C-2040-U	H60xD2040	60+60	12000						
	LC4060-C-2440-U	H60xD2440	75+75	15000						
	LC4060-C-3040-U	H60xD3040	90+90	18000						
	LC4060-C-4040-U	H60xD4040	120+120	24000						
	LC4060-C-5040-U	H60xD5040	160+160	32000						
	LC4060-C-6040-U	H60xD6040	180+180	36000						
	LC4060-C-7040-U	H60xD7040	240+240	48000						
	LC6060-C-450-U	H60xD450	20+10	3000						
	LC6060-C-660-U	H60xD660	30+15	4500						
	LC6060-C-900-U	H60xD900	40+20	6000						
	LC6060-C-1060-U	H60xD1060	50+25	7500						
	LC6060-C-1200-U	H60xD1200	60+30	9000						
	LC6060-C-1560-U	H60xD1560	80+40	12000						
	LC6060-C-1860-U	H60xD1860	110+55	16500						
	LC6060-C-2060-U	H60xD2060	120+60	18000						
	LC6060-C-2460-U	H60xD2460	150+75	22500						
	LC6060-C-3060-U	H60xD3060	180+90	27000						
	LC6060-C-4060-U	H60xD4060	240+120	36000						
	LC6060-C-5060-U	H60xD5060	320+160	48000						
	LC6060-C-6060-U	H60xD6060	360+180	54000						
	LC6060-C-7060-U	H60xD7060	480+240	72000						
	LC8060-C-680-U	H60xD680	30+15	4500						
	LC8060-C-900-U	H60xD900	50+25	7500						
	LC8060-C-1200-U	H60xD1200	80+40	12000						
	LC8060-C-1580-U	H60xD1580	120+60	18000						
	LC8060-C-1880-U	H60xD1880	160+80	24000						
	LC8060-C-2080-U	H60xD2080	180+90	27000						
	LC8060-C-2480-U	H60xD2480	225+110	33500						
	LC8060-C-3080-U	H60xD3080	270+135	40500						
	LC8060-C-4080-U	H60xD4080	360+180	54000						
	LC8060-C-5080-U	H60xD5080	480+240	72000						
	LC8060-C-6080-U	H60xD6080	540+270	81000						
LC8060-C-7080-U	H60xD7080	720+360	108000							

Ordering code for Up&down-Circle series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-C-450-U	H80xD450	10+10	2000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-C-600-U	H80xD600	15+15	3000						
	LC4080-C-740-U	H80xD740	20+20	4000						
	LC4080-C-900-U	H80xD900	25+25	5000						
	LC4080-C-1000-U	H80xD1000	30+30	6000						
	LC4080-C-1200-U	H80xD1200	35+35	7000						
	LC4080-C-1540-U	H80xD1540	40+40	8000						
	LC4080-C-1840-U	H80xD1840	55+55	11000						
	LC4080-C-2040-U	H80xD2040	60+60	12000						
	LC4080-C-2440-U	H80xD2440	75+75	15000						
	LC4080-C-3040-U	H80xD3040	90+90	18000						
	LC4080-C-4040-U	H80xD4040	120+120	24000						
	LC4080-C-5040-U	H80xD5040	160+160	32000						
	LC4080-C-6040-U	H80xD6040	180+180	36000						
	LC4080-C-7040-U	H80xD7040	240+240	48000						
	LC6080-C-450-U	H80xD450	20+10	3000						
	LC6080-C-660-U	H80xD660	30+15	4500						
	LC6080-C-900-U	H80xD900	40+20	6000						
	LC6080-C-1060-U	H80xD1060	50+25	7500						
	LC6080-C-1200-U	H80xD1200	60+30	9000						
	LC6080-C-1560-U	H80xD1560	80+40	12000						
	LC6080-C-1860-U	H80xD1860	110+55	16500						
	LC6080-C-2060-U	H80xD2060	120+60	18000						
	LC6080-C-2460-U	H80xD2460	150+75	22500						
	LC6080-C-3060-U	H80xD3060	180+90	27000						
	LC6080-C-4060-U	H80xD4060	240+120	36000						
	LC6080-C-5060-U	H80xD5060	320+160	48000						
	LC6080-C-6060-U	H80xD6060	360+180	54000						
	LC6080-C-7060-U	H80xD7060	480+240	72000						
	LC8080-C-680-U	H80xD680	30+15	4500						
	LC8080-C-900-U	H80xD900	50+25	7500						
	LC8080-C-1200-U	H80xD1200	80+40	12000						
	LC8080-C-1580-U	H80xD1580	120+60	18000						
	LC8080-C-1880-U	H80xD1880	160+80	24000						
	LC8080-C-2080-U	H80xD2080	180+90	27000						
	LC8080-C-2480-U	H80xD2480	225+110	33500						
	LC8080-C-3080-U	H80xD3080	270+135	40500						
	LC8080-C-4080-U	H80xD4080	360+180	54000						
	LC8080-C-5080-U	H80xD5080	480+240	72000						
	LC8080-C-6080-U	H80xD6080	540+270	81000						
LC8080-C-7080-U	H80xD7080	720+360	108000							

Ordering code for Up&down-S series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-S-610-U	H60xW118xL610	5+5	1000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-S-820-U	H60xW148xL820	7.5+7.5	1500						
	LC4060-S-1250-U	H60xW270xL1250	13+13	2600						
	LC4060-S-1525-U	H60xW324xL1525	17+17	3400						
	LC4060-S-1700-U	H60xW358xL1700	20+20	4000						
	LC4060-S-2045-U	H60xW426xL2045	23+23	4600						
	LC4060-S-2150-U	H60xW336xL2150	20+20	4000						
	LC4060-S-2575-U	H60xW396xL2575	28+28	5600						
	LC4060-S-2860-U	H60xW436xL2860	30+30	6000						
	LC4060-S-3425-U	H60xW516xL3425	38+38	7600						
	LC4060-S-5235-U	H60xW1052xL5235	60+60	12000						
	LC4060-S-5685-U	H60xW836xL5685	60+60	12000						
	LC4060-S-7100-U	H60xW1036xL7100	80+80	16000						
	LC4060-S-8515-U	H60xW1236xL8515	90+90	18000						
	LC4060-S-9930-U	H60xW1436xL9930	120+120	24000						
	LC6060-S-600-U	H60xW131xL600	10+5	1500						
	LC6060-S-895-U	H60xW173xL895	15+7	2200						
	LC6060-S-1510-U	H60xW333xL1510	27+13	4000						
	LC6060-S-1785-U	H60xW388xL1785	34+17	5100						
	LC6060-S-2030-U	H60xW435xL2030	40+20	6000						
	LC6060-S-2165-U	H60xW353xL2165	40+20	6000						
	LC6060-S-2590-U	H60xW413xL2590	55+27	8200						
	LC6060-S-2875-U	H60xW453xL2875	60+30	9000						
	LC6060-S-3440-U	H60xW533xL3440	75+37	11200						
	LC6060-S-5250-U	H60xW1067xL5250	120+60	18000						
	LC6060-S-5700-U	H60xW853xL5700	120+60	18000						
	LC6060-S-7115-U	H60xW1053xL7115	160+80	24000						
	LC6060-S-8530-U	H60xW1253xL8530	180+90	27000						
	LC6060-S-9945-U	H60xW1453xL9945	240+120	36000						
	LC8060-S-910-U	H60xW190xL910	15+7	2200						
	LC8060-S-1495-U	H60xW342xL1495	34+17	5100						
	LC8060-S-2010-U	H60xW444xL2010	54+27	8100						
	LC8060-S-2180-U	H60xW371xL2180	60+30	9000						
	LC8060-S-2605-U	H60xW431xL2605	80+40	12000						
	LC8060-S-2890-U	H60xW471xL2890	90+45	13500						
	LC8060-S-3455-U	H60xW551xL3455	112+56	16800						
	LC8060-S-5270-U	H60xW1083xL5270	180+90	27000						
	LC8060-S-5715-U	H60xW871xL5715	180+90	27000						
	LC8060-S-7130-U	H60xW1071xL7130	240+120	36000						
	LC8060-S-8545-U	H60xW1271xL8545	270+135	40500						
LC8060-S-9960-U	H60xW1471xL9960	360+180	54000							

Ordering code for Up&down-S series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-S-610-U	H80xW118xL610	5+5	1000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-S-820-U	H80xW148xL820	7.5+7.5	1500						
	LC4080-S-1250-U	H80xW270xL1250	13+13	2600						
	LC4080-S-1525-U	H80xW324xL1525	17+17	3400						
	LC4080-S-1700-U	H80xW358xL1700	20+20	4000						
	LC4080-S-2045-U	H80xW426xL2045	23+23	4600						
	LC4080-S-2150-U	H80xW336xL2150	20+20	4000						
	LC4080-S-2575-U	H80xW396xL2575	28+28	5600						
	LC4080-S-2860-U	H80xW436xL2860	30+30	6000						
	LC4080-S-3425-U	H80xW516xL3425	38+38	7600						
	LC4080-S-5235-U	H80xW1052xL5235	60+60	12000						
	LC4080-S-5685-U	H80xW836xL5685	60+60	12000						
	LC4080-S-7100-U	H80xW1036xL7100	80+80	16000						
	LC4080-S-8515-U	H80xW1236xL8515	90+90	18000						
	LC4080-S-9930-U	H80xW1436xL9930	120+120	24000						
	LC6080-S-600-U	H80xW131xL600	10+5	1500						
	LC6080-S-895-U	H80xW173xL895	15+7	2200						
	LC6080-S-1510-U	H80xW333xL1510	27+13	4000						
	LC6080-S-1785-U	H80xW388xL1785	34+17	5100						
	LC6080-S-2030-U	H80xW435xL2030	40+20	6000						
	LC6080-S-2165-U	H80xW353xL2165	40+20	6000						
	LC6080-S-2590-U	H80xW413xL2590	55+27	8200						
	LC6080-S-2875-U	H80xW453xL2875	60+30	9000						
	LC6080-S-3440-U	H80xW533xL3440	75+37	11200						
	LC6080-S-5250-U	H80xW1067xL5250	120+60	18000						
	LC6080-S-5700-U	H80xW853xL5700	120+60	18000						
	LC6080-S-7115-U	H80xW1053xL7115	160+80	24000						
	LC6080-S-8530-U	H80xW1253xL8530	180+90	27000						
	LC6080-S-9945-U	H80xW1453xL9945	240+120	36000						
	LC8080-S-910-U	H80xW190xL910	15+7	2200						
	LC8080-S-1495-U	H80xW342xL1495	34+17	5100						
	LC8080-S-2010-U	H80xW444xL2010	54+27	8100						
	LC8080-S-2180-U	H80xW371xL2180	60+30	9000						
	LC8080-S-2605-U	H80xW431xL2605	80+40	12000						
	LC8080-S-2890-U	H80xW471xL2890	90+45	13500						
	LC8080-S-3455-U	H80xW551xL3455	112+56	16800						
	LC8080-S-5270-U	H80xW1083xL5270	180+90	27000						
	LC8080-S-5715-U	H80xW871xL5715	180+90	27000						
	LC8080-S-7130-U	H80xW1071xL7130	240+120	36000						
	LC8080-S-8545-U	H80xW1271xL8545	270+135	40500						
LC8080-S-9960-U	H80xW1471xL9960	360+180	54000							

Ordering code for Up&down-Faith series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-F-450-U	H60xW450xL425	9+9	1800	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-F-600-U	H60xW600xL500	11+11	2200						
	LC4060-F-740-U	H60xW740xL570	14+14	2800						
	LC4060-F-900-U	H60xW900xL650	16+16	3200						
	LC4060-F-1000-U	H60xW1000xL700	19+19	3800						
	LC4060-F-1200-U	H60xW1200xL800	21+21	4200						
	LC4060-F-1540-U	H60xW1540xL770	20+20	4000						
	LC4060-F-1840-U	H60xW1840xL920	27+27	5400						
	LC4060-F-2040-U	H60xW2040xL1020	30+30	6000						
	LC4060-F-2440-U	H60xW2440xL1220	37+37	7400						
	LC4060-F-3040-U	H60xW3040xL1520	45+45	9000						
	LC4060-F-4040-U	H60xW4040xL2020	60+60	12000						
	LC4060-F-5040-U	H60xW5040xL2520	80+80	16000						
	LC4060-F-6040-U	H60xW6040xL3020	90+90	18000						
	LC4060-F-7040-U	H60xW7040xL3520	120+120	24000						
	LC6060-F-450-U	H60xW450xL425	20+10	3000						
	LC6060-F-660-U	H60xW660xL530	25+12	3700						
	LC6060-F-900-U	H60xW900xL650	30+15	4500						
	LC6060-F-1060-U	H60xW1060xL730	35+17	5200						
	LC6060-F-1200-U	H60xW1200xL800	40+20	6000						
	LC6060-F-1560-U	H60xW1560xL780	40+20	6000						
	LC6060-F-1860-U	H60xW1860xL930	55+27	8200						
	LC6060-F-2060-U	H60xW2060xL1030	60+30	9000						
	LC6060-F-2460-U	H60xW2460xL1230	75+37	11200						
	LC6060-F-3060-U	H60xW3060xL1530	90+45	13500						
	LC6060-F-4060-U	H60xW4060xL2030	120+60	18000						
	LC6060-F-5060-U	H60xW5060xL2530	160+80	24000						
	LC6060-F-6060-U	H60xW6060xL3030	180+90	27000						
	LC6060-F-7060-U	H60xW7060xL3530	240+120	36000						
	LC8060-F-680-U	H60xW680xL540	30+15	4500						
	LC8060-F-900-U	H60xW900xL650	40+20	6000						
	LC8060-F-1200-U	H60xW1200xL800	55+27	8200						
	LC8060-F-1580-U	H60xW1580xL790	60+30	9000						
	LC8060-F-1880-U	H60xW1880xL940	80+40	12000						
	LC8060-F-2080-U	H60xW2080xL1040	90+45	13500						
	LC8060-F-2480-U	H60xW2480xL1240	110+55	16500						
	LC8060-F-3080-U	H60xW3080xL1540	135+67	20200						
	LC8060-F-4080-U	H60xW4080xL2040	180+90	27000						
	LC8060-F-5080-U	H60xW5080xL2540	240+120	36000						
	LC8060-F-6080-U	H60xW6080xL3040	270+135	40500						
LC8060-F-7080-U	H60xW7080xL3540	360+180	54000							

Ordering code for Up&down-Faith series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-F-450-U	H80xW450xL425	9+9	1800	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-F-600-U	H80xW600xL500	11+11	2200						
	LC4080-F-740-U	H80xW740xL570	14+14	2800						
	LC4080-F-900-U	H80xW900xL650	16+16	3200						
	LC4080-F-1000-U	H80xW1000xL700	19+19	3800						
	LC4080-F-1200-U	H80xW1200xL800	21+21	4200						
	LC4080-F-1540-U	H80xW1540xL770	20+20	4000						
	LC4080-F-1840-U	H80xW1840xL920	27+27	5400						
	LC4080-F-2040-U	H80xW2040xL1020	30+30	6000						
	LC4080-F-2440-U	H80xW2440xL1220	37+37	7400						
	LC4080-F-3040-U	H80xW3040xL1520	45+45	9000						
	LC4080-F-4040-U	H80xW4040xL2020	60+60	12000						
	LC4080-F-5040-U	H80xW5040xL2520	80+80	16000						
	LC4080-F-6040-U	H80xW6040xL3020	90+90	18000						
	LC4080-F-7040-U	H80xW7040xL3520	120+120	24000						
	LC6080-F-450-U	H80xW450xL425	20+10	3000						
	LC6080-F-660-U	H80xW660xL530	25+12	3700						
	LC6080-F-900-U	H80xW900xL650	30+15	4500						
	LC6080-F-1060-U	H80xW1060xL730	35+17	5200						
	LC6080-F-1200-U	H80xW1200xL800	40+20	6000						
	LC6080-F-1560-U	H80xW1560xL780	40+20	6000						
	LC6080-F-1860-U	H80xW1860xL930	55+27	8200						
	LC6080-F-2060-U	H80xW2060xL1030	60+30	9000						
	LC6080-F-2460-U	H80xW2460xL1230	75+37	11200						
	LC6080-F-3060-U	H80xW3060xL1530	90+45	13500						
	LC6080-F-4060-U	H80xW4060xL2030	120+60	18000						
	LC6080-F-5060-U	H80xW5060xL2530	160+80	24000						
	LC6080-F-6060-U	H80xW6060xL3030	180+90	27000						
	LC6080-F-7060-U	H80xW7060xL3530	240+120	36000						
	LC8080-F-680-U	H80xW680xL540	30+15	4500						
	LC8080-F-900-U	H80xW900xL650	40+20	6000						
	LC8080-F-1200-U	H80xW1200xL800	55+27	8200						
	LC8080-F-1580-U	H80xW1580xL790	60+30	9000						
	LC8080-F-1880-U	H80xW1880xL940	80+40	12000						
	LC8080-F-2080-U	H80xW2080xL1040	90+45	13500						
	LC8080-F-2480-U	H80xW2480xL1240	110+55	16500						
	LC8080-F-3080-U	H80xW3080xL1540	135+67	20200						
	LC8080-F-4080-U	H80xW4080xL2040	180+90	27000						
	LC8080-F-5080-U	H80xW5080xL2540	240+120	36000						
	LC8080-F-6080-U	H80xW6080xL3040	270+135	40500						
LC8080-F-7080-U	H80xW7080xL3540	360+180	54000							

Ordering code for Up&down-Line parts

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-L-500-U	H60xW40xL500	4+4	800	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-L-600-U	H60xW40xL600	4.5+4.5	900						
	LC4060-L-700-U	H60xW40xL700	5+5	1000						
	LC4060-L-800-U	H60xW40xL800	6+6	1200						
	LC4060-L-900-U	H60xW40xL900	7+7	1400						
	LC4060-L-1000-U	H60xW40xL1000	7.5+7.5	1500						
	LC4060-L-1100-U	H60xW40xL1100	8+8	1600						
	LC4060-L-1200-U	H60xW40xL1200	9+9	1800						
	LC4060-L-1300-U	H60xW40xL1300	10+10	2000						
	LC4060-L-1400-U	H60xW40xL1400	10.5+10.5	2100						
	LC4060-L-1500-U	H60xW40xL1500	11.5+11.5	1150						
	LC4060-L-1600-U	H60xW40xL1600	12.5+12.5	2500						
	LC4060-L-1700-U	H60xW40xL1700	13+13	2600						
	LC4060-L-1800-U	H60xW40xL1800	14+14	2800						
	LC4060-L-1900-U	H60xW40xL1900	15+15	3000						
	LC4060-L-2000-U	H60xW40xL2000	15.5+15.5	3100						
	LC4060-L-2100-U	H60xW40xL2100	16+16	3200						
	LC4060-L-2200-U	H60xW40xL2200	17+17	3400						
	LC4060-L-2300-U	H60xW40xL2300	18+18	3600						
	LC4060-L-2400-U	H60xW40xL2400	19+19	3800						
	LC5060-L-500-U	H60xW50xL500	4+4	800						
	LC5060-L-600-U	H60xW50xL600	4.5+4.5	900						
	LC5060-L-700-U	H60xW50xL700	5+5	1000						
	LC5060-L-800-U	H60xW50xL800	6+6	1200						
	LC5060-L-900-U	H60xW50xL900	7+7	1400						
	LC5060-L-1000-U	H60xW50xL1000	7.5+7.5	1500						
	LC5060-L-1100-U	H60xW50xL1100	8+8	1600						
	LC5060-L-1200-U	H60xW50xL1200	9+9	1800						
	LC5060-L-1300-U	H60xW50xL1300	10+10	2000						
	LC5060-L-1400-U	H60xW50xL1400	10.5+10.5	2100						
	LC5060-L-1500-U	H60xW50xL1500	11.5+11.5	1150						
	LC5060-L-1600-U	H60xW50xL1600	12.5+12.5	2500						
LC5060-L-1700-U	H60xW50xL1700	13+13	2600							
LC5060-L-1800-U	H60xW50xL1800	14+14	2800							
LC5060-L-1900-U	H60xW50xL1900	15+15	3000							
LC5060-L-2000-U	H60xW50xL2000	15.5+15.5	3100							
LC5060-L-2100-U	H60xW50xL2100	16+16	3200							
LC5060-L-2200-U	H60xW50xL2200	17+17	3400							
LC5060-L-2300-U	H60xW50xL2300	18+18	3600							
LC5060-L-2400-U	H60xW50xL2400	19+19	3800							

Ordering code for Up&down-Line parts

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC6060-L-500-U	H60xW60xL500	9+4	1300	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC6060-L-600-U	H60xW60xL600	10+5	1500						
	LC6060-L-700-U	H60xW60xL700	12+6	1800						
	LC6060-L-800-U	H60xW60xL800	14+7	2100						
	LC6060-L-900-U	H60xW60xL900	16+8	2400						
	LC6060-L-1000-U	H60xW60xL1000	17+8	2500						
	LC6060-L-1100-U	H60xW60xL1100	19+9	2800						
	LC6060-L-1200-U	H60xW60xL1200	21+10	3100						
	LC6060-L-1300-U	H60xW60xL1300	23+11	3400						
	LC6060-L-1400-U	H60xW60xL1400	25+12	3700						
	LC6060-L-1500-U	H60xW60xL1500	26+13	3900						
	LC6060-L-1600-U	H60xW60xL1600	28+14	4200						
	LC6060-L-1700-U	H60xW60xL1700	30+14	4400						
	LC6060-L-1800-U	H60xW60xL1800	31+15	4600						
	LC6060-L-1900-U	H60xW60xL1900	33+16	4900						
	LC6060-L-2000-U	H60xW60xL2000	35+17	5200						
	LC6060-L-2100-U	H60xW60xL2100	37+18	5500						
	LC6060-L-2200-U	H60xW60xL2200	39+19	5800						
	LC6060-L-2300-U	H60xW60xL2300	40+20	6000						
	LC6060-L-2400-U	H60xW60xL2400	42+21	6300						
	LC8060-L-500-U	H60xW80xL500	13+6	1900						
	LC8060-L-600-U	H60xW80xL600	16+8	2400						
	LC8060-L-700-U	H60xW80xL700	19+9	2800						
	LC8060-L-800-U	H60xW80xL800	22+11	3300						
	LC8060-L-900-U	H60xW80xL900	24+12	3600						
	LC8060-L-1000-U	H60xW80xL1000	27+13	4000						
	LC8060-L-1100-U	H60xW80xL1100	30+15	4500						
	LC8060-L-1200-U	H60xW80xL1200	32+16	4800						
	LC8060-L-1300-U	H60xW80xL1300	35+17	5200						
	LC8060-L-1400-U	H60xW80xL1400	38+19	5700						
	LC8060-L-1500-U	H60xW80xL1500	41+20	6100						
	LC8060-L-1600-U	H60xW80xL1600	43+21	6300						
LC8060-L-1700-U	H60xW80xL1700	46+23	6900							
LC8060-L-1800-U	H60xW80xL1800	49+24	7300							
LC8060-L-1900-U	H60xW80xL1900	51+25	7600							
LC8060-L-2000-U	H60xW80xL2000	54+27	8100							
LC8060-L-2100-U	H60xW80xL2100	57+28	8500							
LC8060-L-2200-U	H60xW80xL2200	59+29	8800							
LC8060-L-2300-U	H60xW80xL2300	62+31	9300							
LC8060-L-2400-U	H60xW80xL2400	65+32	9700							

Ordering code for Up&down-Line parts

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-L-500-U	H80xW40xL500	4+4	800	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-L-600-U	H80xW40xL600	4.5+4.5	900						
	LC4080-L-700-U	H80xW40xL700	5+5	1000						
	LC4080-L-800-U	H80xW40xL800	6+6	1200						
	LC4080-L-900-U	H80xW40xL900	7+7	1400						
	LC4080-L-1000-U	H80xW40xL1000	7.5+7.5	1500						
	LC4080-L-1100-U	H80xW40xL1100	8+8	1600						
	LC4080-L-1200-U	H80xW40xL1200	9+9	1800						
	LC4080-L-1300-U	H80xW40xL1300	10+10	2000						
	LC4080-L-1400-U	H80xW40xL1400	10.5+10.5	2100						
	LC4080-L-1500-U	H80xW40xL1500	11.5+11.5	2150						
	LC4080-L-1600-U	H80xW40xL1600	12.5+12.5	2500						
	LC4080-L-1700-U	H80xW40xL1700	13+13	2600						
	LC4080-L-1800-U	H80xW40xL1800	14+14	2800						
	LC4080-L-1900-U	H80xW40xL1900	15+15	3000						
	LC4080-L-2000-U	H80xW40xL2000	15.5+15.5	3100						
	LC4080-L-2100-U	H80xW40xL2100	16+16	3200						
	LC4080-L-2200-U	H80xW40xL2200	17+17	3400						
	LC4080-L-2300-U	H80xW40xL2300	18+18	3600						
	LC4080-L-2400-U	H80xW40xL2400	19+19	3800						
	LC6080-L-500-U	H80xW60xL500	9+4	1300						
	LC6080-L-600-U	H80xW60xL600	10+5	1500						
	LC6080-L-700-U	H80xW60xL700	12+6	1800						
	LC6080-L-800-U	H80xW60xL800	14+7	2100						
	LC6080-L-900-U	H80xW60xL900	16+8	2400						
	LC6080-L-1000-U	H80xW60xL1000	17+8	2500						
	LC6080-L-1100-U	H80xW60xL1100	19+9	2800						
	LC6080-L-1200-U	H80xW60xL1200	21+10	3100						
	LC6080-L-1300-U	H80xW60xL1300	23+11	3400						
	LC6080-L-1400-U	H80xW60xL1400	25+12	3700						
	LC6080-L-1500-U	H80xW60xL1500	26+13	3900						
	LC6080-L-1600-U	H80xW60xL1600	28+14	4200						
LC6080-L-1700-U	H80xW60xL1700	30+14	4400							
LC6080-L-1800-U	H80xW60xL1800	31+15	4600							
LC6080-L-1900-U	H80xW60xL1900	33+16	4900							
LC6080-L-2000-U	H80xW60xL2000	35+17	5200							
LC6080-L-2100-U	H80xW60xL2100	37+18	5500							
LC6080-L-2200-U	H80xW60xL2200	39+19	5800							
LC6080-L-2300-U	H80xW60xL2300	40+20	6000							
LC6080-L-2400-U	H80xW60xL2400	42+21	6300							

Ordering code for Up&down-Line parts

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC8080-L-500-U	H80xW80xL500	13+6	1900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC8080-L-600-U	H80xW80xL600	16+8	2400						
	LC8080-L-700-U	H80xW80xL700	19+9	2800						
	LC8080-L-800-U	H80xW80xL800	22+11	3300						
	LC8080-L-900-U	H80xW80xL900	24+12	3600						
	LC8080-L-1000-U	H80xW80xL1000	27+13	4000						
	LC8080-L-1100-U	H80xW80xL1100	30+15	4500						
	LC8080-L-1200-U	H80xW80xL1200	32+16	4800						
	LC8080-L-1300-U	H80xW80xL1300	35+17	5200						
	LC8080-L-1400-U	H80xW80xL1400	38+19	5700						
	LC8080-L-1500-U	H80xW80xL1500	41+20	6100						
	LC8080-L-1600-U	H80xW80xL1600	43+21	6300						
	LC8080-L-1700-U	H80xW80xL1700	46+23	6900						
	LC8080-L-1800-U	H80xW80xL1800	49+24	7300						
	LC8080-L-1900-U	H80xW80xL1900	51+25	7600						
	LC8080-L-2000-U	H80xW80xL2000	54+27	8100						
	LC8080-L-2100-U	H80xW80xL2100	57+28	8500						
	LC8080-L-2200-U	H80xW80xL2200	59+29	8800						
	LC8080-L-2300-U	H80xW80xL2300	62+31	9300						
	LC8080-L-2400-U	H80xW80xL2400	65+32	9700						
	LC12080-L-500-U	H80xW120xL500	18+9	2700						
	LC12080-L-600-U	H80xW120xL600	22+11	3300						
	LC12080-L-700-U	H80xW120xL700	26+13	3900						
	LC12080-L-800-U	H80xW120xL800	30+15	4500						
	LC12080-L-900-U	H80xW120xL900	33+16	4900						
	LC12080-L-1000-U	H80xW120xL1000	37+18	5500						
	LC12080-L-1100-U	H80xW120xL1100	40+20	6000						
	LC12080-L-1200-U	H80xW120xL1200	44+22	6600						
	LC12080-L-1300-U	H80xW120xL1300	48+24	7200						
	LC12080-L-1400-U	H80xW120xL1400	52+26	7800						
	LC12080-L-1500-U	H80xW120xL1500	55+27	8200						
	LC12080-L-1600-U	H80xW120xL1600	59+29	8800						
LC12080-L-1700-U	H80xW120xL1700	63+31	9400							
LC12080-L-1800-U	H80xW120xL1800	67+33	10000							
LC12080-L-1900-U	H80xW120xL1900	70+35	10500							
LC12080-L-2000-U	H80xW120xL2000	74+37	11100							
LC12080-L-2100-U	H80xW120xL2100	77+38	11500							
LC12080-L-2200-U	H80xW120xL2200	81+40	12100							
LC12080-L-2300-U	H80xW120xL2300	85+42	12700							
LC12080-L-2400-U	H80xW120xL2400	88+44	13200							

Ordering code for Up&down-Belief series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-B-450-U	H60xW236xL601	6+3	900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-B-600-U	H60xW258xL707	8+4	1200						
	LC4060-B-740-U	H60xW278xL806	9+4	1300						
	LC4060-B-900-U	H60xW302xL919	10+5	1500						
	LC4060-B-1000-U	H60xW316xL990	12+6	1800						
	LC4060-B-1200-U	H60xW345xL1131	13+6	1900						
	LC4060-B-1540-U	H60xW254xL1089	10+5	1500						
	LC4060-B-1840-U	H60xW298xL1301	14+7	2100						
	LC4060-B-2040-U	H60xW327xL1443	15+7	2200						
	LC4060-B-2440-U	H60xW386xL1725	19+9	2800						
	LC4060-B-3040-U	H60xW473xL2150	22+11	3300						
	LC4060-B-4040-U	H60xW620xL2857	30+15	4500						
	LC4060-B-5040-U	H60xW766xL3564	40+20	6000						
	LC4060-B-6040-U	H60xW913xL4271	45+22	6700						
	LC4060-B-7040-U	H60xW1059xL4978	60+30	9000						
	LC6060-B-450-U	H60xW250xL601	15+7	2200						
	LC6060-B-660-U	H60xW281xL750	18+9	2700						
	LC6060-B-900-U	H60xW316xL919	20+10	3000						
	LC6060-B-1060-U	H60xW339xL1032	22+11	3300						
	LC6060-B-1200-U	H60xW360xL1131	25+12	3700						
	LC6060-B-1560-U	H60xW271xL1103	20+10	3000						
	LC6060-B-1860-U	H60xW315xL1315	27+13	4000						
	LC6060-B-2060-U	H60xW344xL1457	30+15	4500						
	LC6060-B-2460-U	H60xW403xL1739	37+18	5500						
	LC6060-B-3060-U	H60xW491xL2164	45+22	6700						
	LC6060-B-4060-U	H60xW637xL2871	60+30	9000						
	LC6060-B-5060-U	H60xW783xL3578	80+40	12000						
	LC6060-B-6060-U	H60xW930xL4285	90+45	13500						
	LC6060-B-7060-U	H60xW1076xL4992	120+60	18000						
	LC8060-B-680-U	H60xW298xL764	22+11	3300						
	LC8060-B-900-U	H60xW330xL919	27+13	4000						
	LC8060-B-1200-U	H60xW374xL1131	35+17	5200						
	LC8060-B-1580-U	H60xW288xL1117	30+15	4500						
	LC8060-B-1880-U	H60xW332xL1329	40+20	6000						
	LC8060-B-2080-U	H60xW361xL1471	45+22	6700						
	LC8060-B-2480-U	H60xW420xL1754	56+28	8400						
	LC8060-B-3080-U	H60xW508xL2178	67+33	10000						
	LC8060-B-4080-U	H60xW654xL2885	90+45	13500						
	LC8060-B-5080-U	H60xW801xL3592	120+60	18000						
	LC8060-B-6080-U	H60xW947xL4299	135+67	20200						
	LC8060-B-7080-U	H60xW1093xL5006	180+90	27000						

Ordering code for Up&down-Belief series

*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-B-450-U	H80xW236xL601	6+3	900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-B-600-U	H80xW258xL707	8+4	1200						
	LC4080-B-740-U	H80xW278xL806	9+4	1300						
	LC4080-B-900-U	H80xW302xL919	10+5	1500						
	LC4080-B-1000-U	H80xW316xL990	12+6	1800						
	LC4080-B-1200-U	H80xW345xL1131	13+6	1900						
	LC4080-B-1540-U	H80xW254xL1089	10+5	1500						
	LC4080-B-1840-U	H80xW298xL1301	14+7	2100						
	LC4080-B-2040-U	H80xW327xL1443	15+7	2200						
	LC4080-B-2440-U	H80xW386xL1725	19+9	2800						
	LC4080-B-3040-U	H80xW473xL2150	22+11	3300						
	LC4080-B-4040-U	H80xW620xL2857	30+15	4500						
	LC4080-B-5040-U	H80xW766xL3564	40+20	6000						
	LC4080-B-6040-U	H80xW913xL4271	45+22	6700						
	LC4080-B-7040-U	H80xW1059xL4978	60+30	9000						
	LC6080-B-450-U	H80xW250xL601	15+7	2200						
	LC6080-B-660-U	H80xW281xL750	18+9	2700						
	LC6080-B-900-U	H80xW316xL919	20+10	3000						
	LC6080-B-1060-U	H80xW339xL1032	22+11	3300						
	LC6080-B-1200-U	H80xW360xL1131	25+12	3700						
	LC6080-B-1560-U	H80xW271xL1103	20+10	3000						
	LC6080-B-1860-U	H80xW315xL1315	27+13	4000						
	LC6080-B-2060-U	H80xW344xL1457	30+15	4500						
	LC6080-B-2460-U	H80xW403xL1739	37+18	5500						
	LC6080-B-3060-U	H80xW491xL2164	45+22	6700						
	LC6080-B-4060-U	H80xW637xL2871	60+30	9000						
	LC6080-B-5060-U	H80xW783xL3578	80+40	12000						
	LC6080-B-6060-U	H80xW930xL4285	90+45	13500						
	LC6080-B-7060-U	H80xW1076xL4992	120+60	18000						
	LC8080-B-680-U	H80xW298xL764	22+11	3300						
	LC8080-B-900-U	H80xW330xL919	27+13	4000						
	LC8080-B-1200-U	H80xW374xL1131	35+17	5200						
	LC8080-B-1580-U	H80xW288xL1117	30+15	4500						
	LC8080-B-1880-U	H80xW332xL1329	40+20	6000						
	LC8080-B-2080-U	H80xW361xL1471	45+22	6700						
	LC8080-B-2480-U	H80xW420xL1754	56+28	8400						
	LC8080-B-3080-U	H80xW508xL2178	67+33	10000						
	LC8080-B-4080-U	H80xW654xL2885	90+45	13500						
	LC8080-B-5080-U	H80xW801xL3592	120+60	18000						
	LC8080-B-6080-U	H80xW947xL4299	135+67	20200						
	LC8080-B-7080-U	H80xW1093xL5006	180+90	27000						



TAKE NOTES FOR YOUR FAVORITE



CCT:

Dim:

Size:

Color:

Power:

